

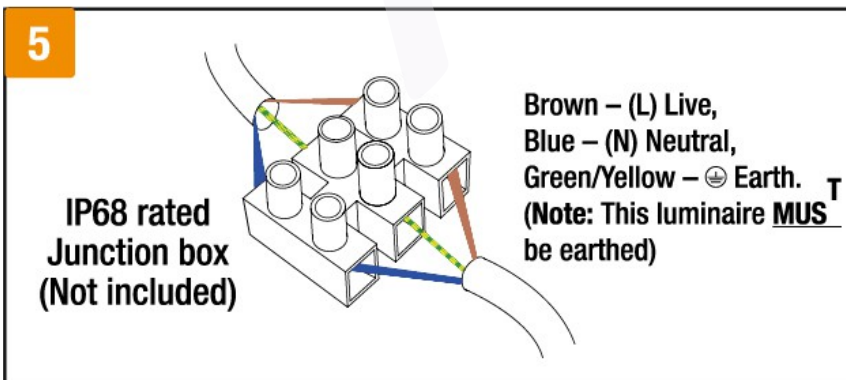
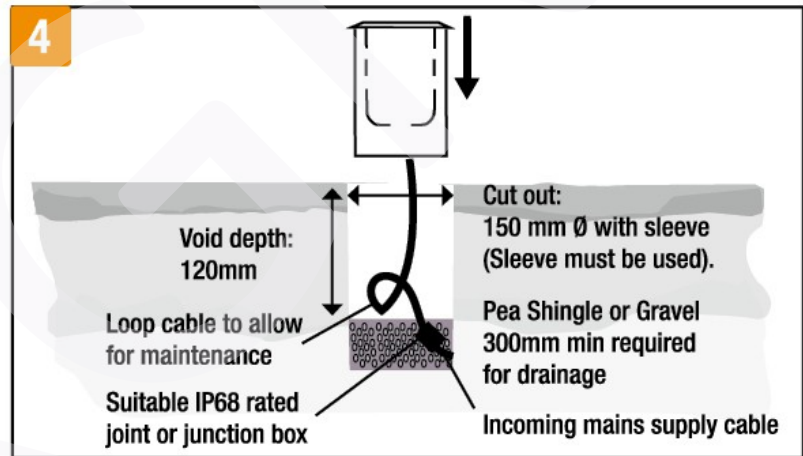
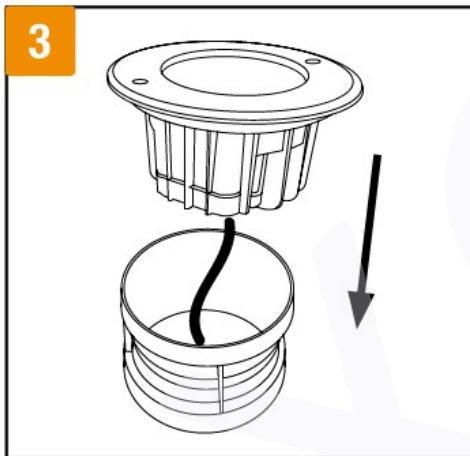


XGN LAMPE

DÉTAILS DE
L'ÉCLAIRAGE

Lumeitalia

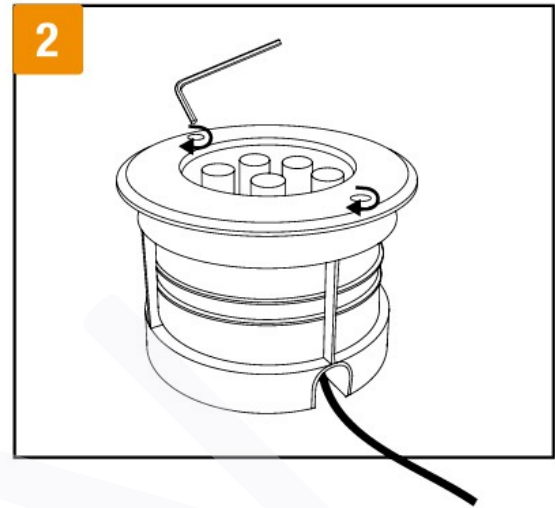

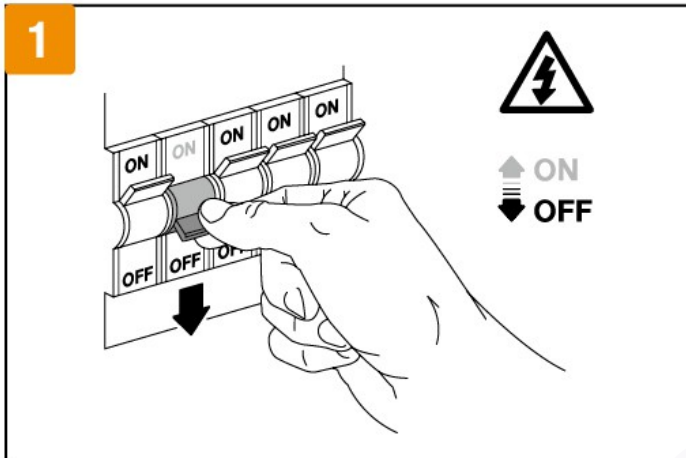

STAINLESS STEEL LIGHTS



XGN-62



XGN-52



XGN-73



Technical Parameter

Model	XGN-15	XGN-15L	XGN-20
Size	Φ 22*H55mm	Φ 22*H65mm	Φ 22*H35mm
Rated Power	0.3W	0.3W	0.3W
Input Voltage	DC12V/24V		
Hole Size			
N.W/G.W	0.05kg	0.075kg	0.03kg
Packing Size			



Technical Parameter

Model	XGN-10	XGN-30
Size	Φ 10*H40mm	Φ 30*H52mm
Rated Power	0.1W	0.6W
Input Voltage	DC12V	DC12V/24V
Hole Size		D27*H47mm
N.W/G.W	0.02kg/0.05kg	0.13kg/0.16kg
Packing Size		30.5*30.5*18cm/50pcs



- ◆ Chip: Epistar/Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass or PC cover, ABS box

Technical Parameter

Model	XGN-301/XGN-301A/XGN-302/XGN-303
Size	Φ 30*H88mm
Rated Power	0.6W
Input Voltage	DC12V/24V
Hole Size	D27*H47mm
N.W/G.W	0.15kg/0.18kg
Packing Size	30.5*30.5*18cm/50pcs

NARROW BEAM



XGN-92 4°

XGN-110 6°

XGN-42 4°

MINI FLOOR INOX 316L


Lumeitalia



XGN-42

XGN-52

XGN-62



Technical Parameter

Model	XGN-42	XGN-52	XGN-62
Size	Φ42*H73mm	Φ52*H80mm	Φ62*H90mm
Rated Power	1W		
Input Voltage	12V/24V/220/50-60Hz		
Hole Size	Φ40*H75mm	Φ48*H85mm	Φ55*H95mm
N.W/G.W	0.2kg/0.23kg	0.25kg/0.28kg	0.35kg/0.38kg
Packing Size	33.5*33.5*21.5cm/50pcs	33.5*33.5*21.5cm/50pcs	36*36*23cm/50pcs



XGN-73

XGN-92

XGN-110



Technical Parameter

Model	XGN-73	XGN-92	XGN-110
Size	Φ73*H98mm	Φ92*H115mm	Φ110*H130mm
Rated Power	3W		
Input Voltage	12V/24V/220/50-60Hz		
Hole Size	Φ68*H100mm	Φ87*H120mm	Φ105*H140mm
N.W/G.W	0.6kg/0.64kg	0.9kg/0.98kg	1.1kg/1.3kg
Packing Size	42.5*25.5*26cm/30pcs	51.5*21.5*28.5cm/20pcs	58*24*35.5cm/20pcs




Plat

Camber


Stainless steel

Copper

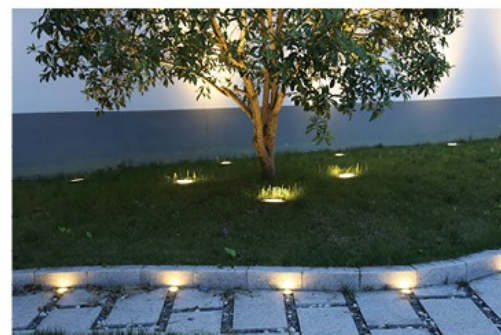


MINI FLOOR SIDE 52 mm

LumeitaliaTM

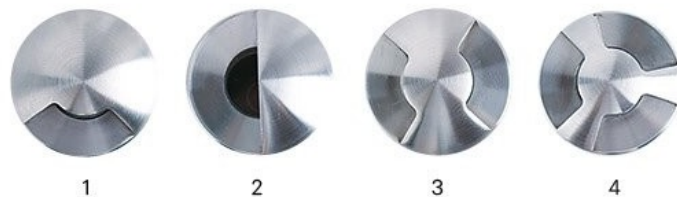


Technical Parameter

Model	XGN-42	
Size	Φ42*H95mm	Φ42*H80mm
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ38*H85mm	Φ40*H75mm
N.W/G.W	0.26kg/0.29kg	
Packing Size	33.5*33.5*21.5cm/50pcs	

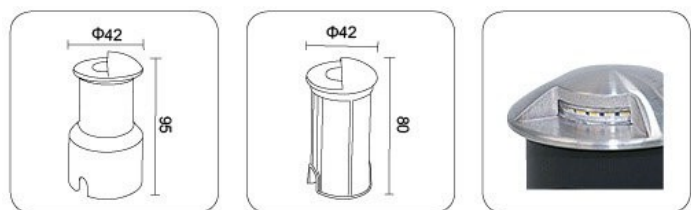

Technical Parameter

Model	XGN-52	
Size	Φ52*H96mm	Φ52*H90mm
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ41*H90mm	Φ48*H85mm
N.W/G.W	0.31kg/0.34kg	
Packing Size	33.5*33.5*21.5cm/50pcs	

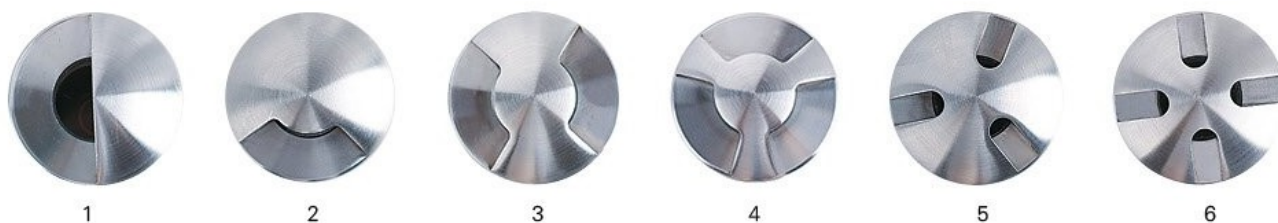

MINI FLOOR SIDE 73 mm

Lumeitalia


TM



- ♦ Chip: Epistar/Bridgelux/Cree
- ♦ CCT: 3000K /4000K /6000K/R/G/B
- ♦ Material: Stainless steel cover+body, Tempered glass or PC cover, ABS box

Technical Parameter


Model	XGN-62	
Size	Φ62*H110mm	Φ62*H100mm
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ53*H100mm	Φ55*H90mm
N.W/G.W	0.38kg/0.41kg	
Packing Size	36*36*23cm/50pcs	



1



2



3



4



5



6



- ♦ Chip: Epistar/Bridgelux/Cree
- ♦ CCT: 3000K /4000K /6000K/R/G/B
- ♦ Material: Stainless steel cover+body, Tempered glass or PC cover, ABS box

Technical Parameter

Model	XGN-73	
Size	Φ73*H115mm	
Rated Power	3W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ68*H100mm	
N.W/G.W	0.68kg/0.73kg	
Packing Size	42.5*25.5*26cm/30pcs	



PC Cover



1



2



3



4



5



6

MINI FLOOR SIDE 92 mm


Lumeitalia™



- ◆ Chip: Epistar/Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass or PC cover, ABS box

Technical Parameter

Model	XGN-92
Size	Φ92*H125mm
Rated Power	3W
Input Voltage	12V/24V/220/50-60Hz
Hole Size	Φ87*H115mm
N.W/G.W	1.07kg/1.12kg
Packing Size	51.5*21.5*28.5cm/20pcs



1



2



3



4



5



6



7



8



9



10



11



Technical Parameter

Model	XGN-110
Size	Φ110*H150mm
Rated Power	3W
Input Voltage	12V/24V/220/50-60Hz
Hole Size	Φ105*H140mm
N.W/G.W	1.66kg/1.7kg
Packing Size	58*24*35.5cm/20pcs

FLOOR
MAXI SOL

LumeitaliaTM



NCC-260



NCC-160C



NCC-100S

**LED INGROUND
LIGHTS**




FLOOR

LumeitaliaTM



NCC-210S




- ♦ Chip: CREE XPE
- ♦ CCT: 3000K /4000K /6000K/R/G/B
- ♦ Material: Stainless steel cover, Aluminum body, Tempered glass
(Clear/Frosted) ABS box
- ♦ Input Voltage: 12V/24V/220V 50-60Hz



Cable Moisture
Insulation Kit


Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
NCC-100S	100	130	3x2W	Φ92*H140	0.85	45*45*35.5cm/18pcs	6° /15° /30°
NCC-130S	130	130	6x2W	Φ121*H135	1.3	53*36*35.5cm/12pcs	6° /15° /30°
NCC-160S	160	140	9x2W	Φ145*H145	2	40*40*38/8pcs	6° /15° /30°
NCC-180S	180	145	12x2W	Φ167*H150	2.5	51.5*35*48cm/8pcs	6° /15° /30°
NCC-210S	210	130	18x2W	Φ195*H140	2.7	52.5*27*35.5cm/4pcs	6° /15° /30°
NCC-260S	260	155	24x2W	Φ241*H160	5.2	66.5*34*46.5cm/4pcs	6° /15° /30°


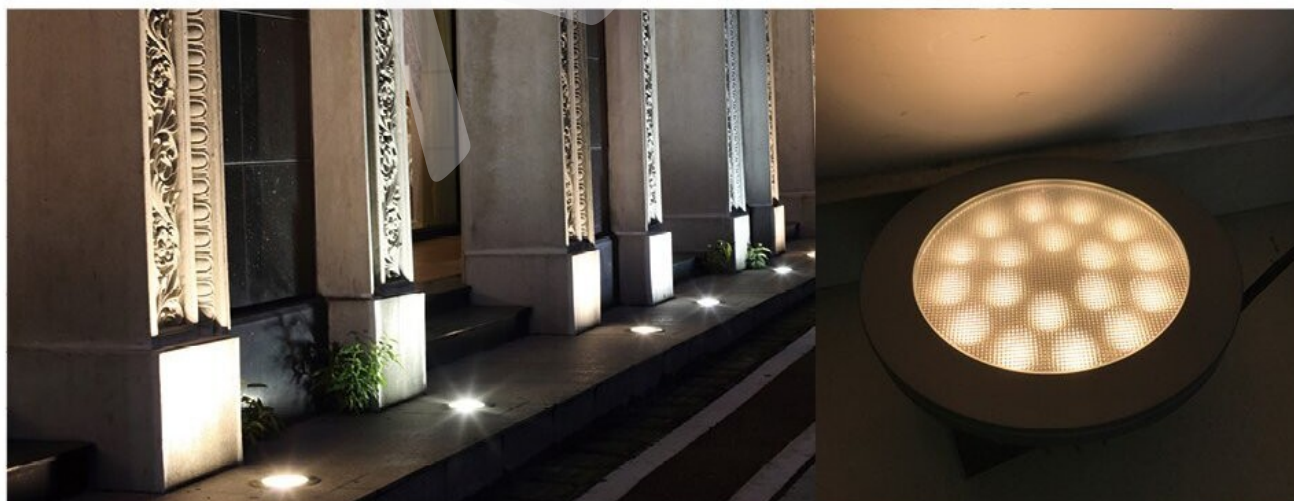




NCC-320

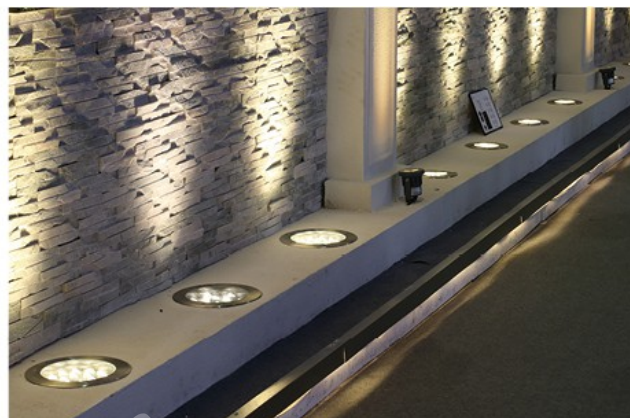

- Chip: Bridgelux/CREE
- CCT: 3000K /4000K /6000K/R/G/B
- Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted) ABS box
- Input Voltage: 12V/24V/220V 50-60Hz



Technical Parameter


Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
NCC-85	85	98	3W	Φ80*H105	0.55kg	56*34*25cm/30pcs	15° /30° /45° /60°
NCC-100	100	108	3W	Φ90*H115	0.7kg	56*23*25cm/20pcs	15° /30° /45° /60°
NCC-130	130	98	5W/6W	Φ120*H105	0.96kg	43*29*36cm/18pcs	15° /30° /45° /60°
NCC-160	160	110	6W/7W/9W	Φ145*H115	1.6kg	52*35.5*26.5cm/12pcs	15° /30° /45° /60°
NCC-180	180	125	9W/12W	Φ170*H135	1.8kg	39*39*28.5cm/8pcs	15° /30° /45° /60°
NCC-210	210	120	12W/15W/18W	Φ200*H130	2.44kg	45*45*28.5cm/8pcs	15° /30° /45° /60°
NCC-230	230	140	15W/18W	Φ220*H150	3kg	48.5*25*45/6pcs	15° /30° /45° /60°
NCC-260	260	125	18W/24W	Φ250*H135	3.7kg	54*28*42/6pcs	15° /30° /45° /60°
NCC-320	320	115	36W	Φ300*H120	5.6kg	67*35*24.5cm/4pcs	15° /30° /45° /60°

FLOOR RF

LumeitaliaTM



NCC-100C



- ♦ Chip: Bridgelux/CREE
- ♦ CCT: 3000K /4000K /6000K/R/G/B
- ♦ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/ Frosted) ABS box
- ♦ Input Voltage: 12V/24V/220V 50-60Hz



Technical Parameter


Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
NCC-85C	85	98	3W	Φ80*H105	0.5	56*34*25cm/30pcs	120°
NCC-100C	100	108	3W	Φ90*H115	0.68	56*23*25cm/20pcs	120°
NCC-130C	130	98	5W	Φ120*H105	0.9	43*29*36cm/18pcs	120°
NCC-160C	160	110	10W	Φ145*H115	1.45	52*35.5*26.5cm/12pcs	120°
NCC-180C	180	125	15W	Φ170*H135	1.68	39*39*28.5cm/8pcs	120°
NCC-210C	210	120	20W	Φ200*H130	2.2	45*45*28.5cm/8pcs	120°
NCC-230C	230	140	30W	Φ220*H150	2.8	48.5*25*45/6pcs	120°
NCC-260C	260	125	30W	Φ250*H135	3.25	54*28*42/6pcs	120°
NCC-320C	320	115	40W	Φ300*H120	4.87	67*35*24.5cm/4pcs	120°

FLOOR RF-S

LumeitaliaTM



NCC-180G



- ◆ Chip: CREE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz

Technical Parameter


Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
NCC-85G	85	98	3W	Φ80*H105	0.5	56*34*25cm/30pcs	10° /20°
NCC-100G	100	108	5W	Φ90*H115	0.7	56*23*25cm/20pcs	10° /20°
NCC-130G	130	98	7W	Φ120*H105	0.97	43*29*36cm/18pcs	10° /20°
NCC-160G	160	110	12W	Φ145*H115	1.59	52*35.5*26.5cm/12pcs	10° /20° /30°
NCC-180G	180	125	15W	Φ170*H135	1.87	39*39*28.5cm/8pcs	10° /20° /30°
NCC-210G	210	120	20W	Φ200*H130	2.3	45*45*28.5cm/8pcs	10° /20° /30°
NCC-230G	230	140	30W	Φ220*H150	3	48.5*25*45/6pcs	10° /20° /30°
NCC-260G	260	125	30W	Φ250*H135	3.64	54*28*42/6pcs	10° /20° /30°

FLOOR RF-M

LumeitaliaTM



NCC-120D




- ◆ Chip: Epistar/CREE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/ Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
NCC-100D	100	145	7W	Φ95*H155	0.83	53*22*32cm/20pcs	15° /38° /60°
NCC-120D	120	98	3W/5W	Φ 105*H100	0.75	43*29*36cm/18pcs	15° /24° /60°
NCC-150D	150	115	10W	Φ 135*H125	1.34	52*35.5*26.5cm/12pcs	15° /24° /60°
NCC-180D	180	125	15W	Φ 170*H130	1.96	39*39*28.5cm/8pcs	15° /24° /38° /60°

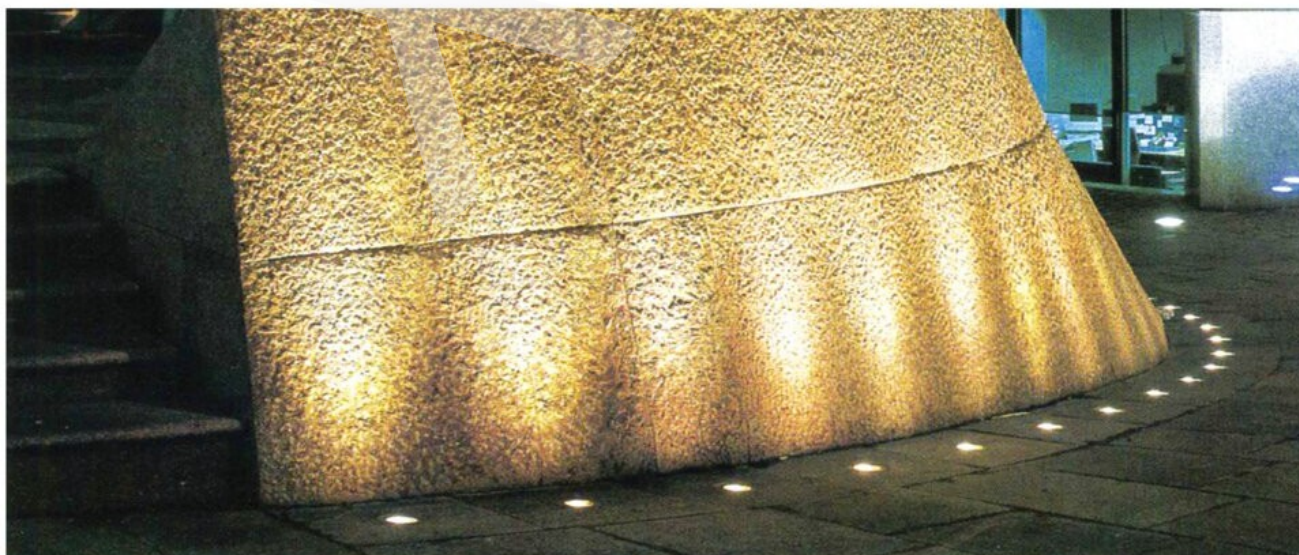


FLOOR UGR

LumeitaliaTM



NCC-180J



- ◆ Chip: CREE
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz




Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
NCC-120J	120	98	3W	Φ105*H100	0.8	43*29*36cm/18pcs	10° /20°
NCC-150J	150	115	10W	Φ135*H125	1.5	52*35.5*26.5cm/12pcs	10° /20°
NCC-180J	180	125	15W	Φ170*H130	2.1	39*39*28.5cm/8pcs	10° /20° /30°





NCC-180P




- ♦ Chip: Bridgelux/Cree
- ♦ CCT: 3000K /4000K /6000K/R/G/B
- ♦ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted), ABS box
- ♦ Input Voltage: 12V/24V/220V 50-60Hz



Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
	Φ	H				
NCC-120P	120	98	3W	Φ 105*H100	0.76kg	43*29*36cm/18pcs
NCC-150P	150	115	7W	Φ 135*H125	1.33kg	52*35.5*26.5cm/12pcs
NCC-180P	180	125	3x2W	Φ 170*H130	1.9kg	39*39*28.5cm/8pcs


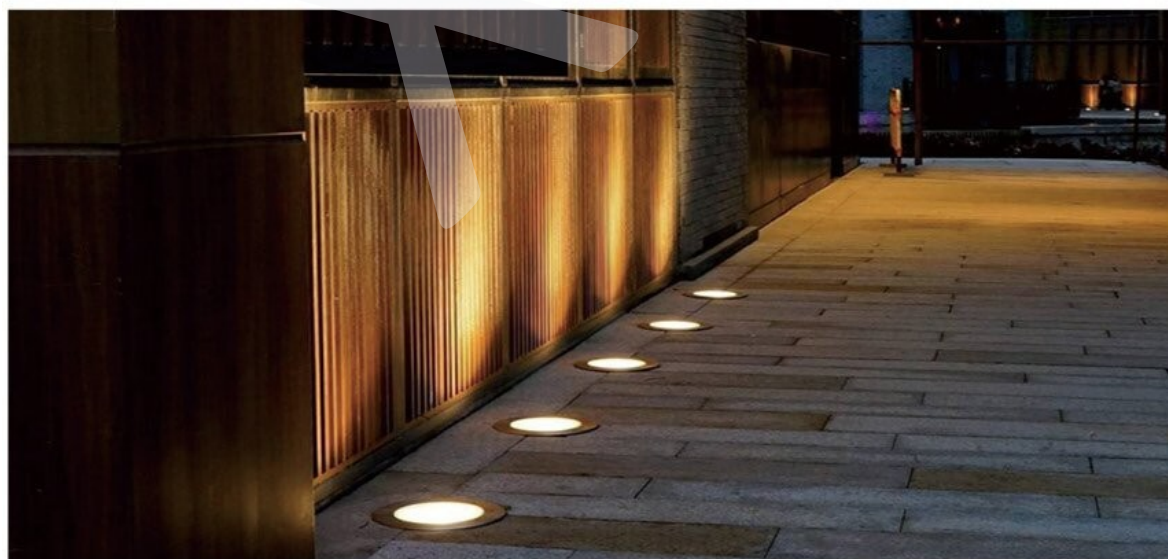


FLOOR ASY-2

LumeitaliaTM




NCC-180X

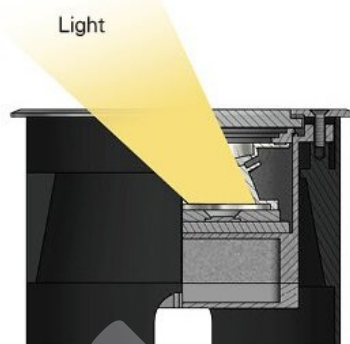

- ♦ Chip: Cree
- ♦ CCT: 3000K /4000K /6000K/R/G/B
- ♦ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/Frosted) ABS box
- ♦ Input Voltage: 12V/24V/220V 50-60Hz



NCC-270P



Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
	Φ	H				
NCC-180X	180	125	15W	Φ 170*H130	1.9kg	39*39*28.5cm/8pcs
NCC-270P	270	195	40W	Φ 245*H205	4.8kg	54*28*42.5cm/4pcs

ADJUSTABLE ON PANEL



The metal
adjustable component

FLOOR -réglable


LumeitaliaTM



XGN-T826



- ◆ Chip: Epistar/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted) ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



Technical Parameter



Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
XGN-T832	320	340	24x2W 50W COB	Φ 305xH350mm	10.1	37.5x37.5x40.5CM/1PCS	6° / 15° / 30°
XGN-T826	260	270	18x1.5W 30W COB	Φ 250xH280mm	7.25	64x33x33CM/2PCS	6° / 15° / 30°
XGN-T823	230	240	15x1.5W 20W COB	Φ 220xH250mm	5	57x30x31/2PCS	6° / 15° / 30°
XGN-T821	210	246	12x1.5W 20W COB	Φ 200xH256mm	4.6	53x53x31CM/4PCS	6° / 15° / 30°
XGN-T818	180	190	9x1.5W 10W COB	Φ 170xH200mm	3	48x48x26CM/4PCS	6° / 15° / 30°
XGN-T815	150	165	3x1.5W 5W COB	Φ 140xH175mm	1.8	49x33x37CM/12PCS	6° / 15° / 30°
XGN-T813	130	140	1x3W 3W COB	Φ 120xH150mm	1.4	53x36x38CM/10PCS	6° / 38°
XGN-T810	100	130	1x3W 3W COB	Φ 90xH140mm	0.85	55.5x34x26.5CM/30PCS	6° / 38°

FLOOR -réglable

LumeitaliaTM




XGN-W320C



XGN-W320



- ◆ Chip: Epistar/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted)ABS box
- ◆ Input Voltage: 12V/24V/110-240V 50-60Hz

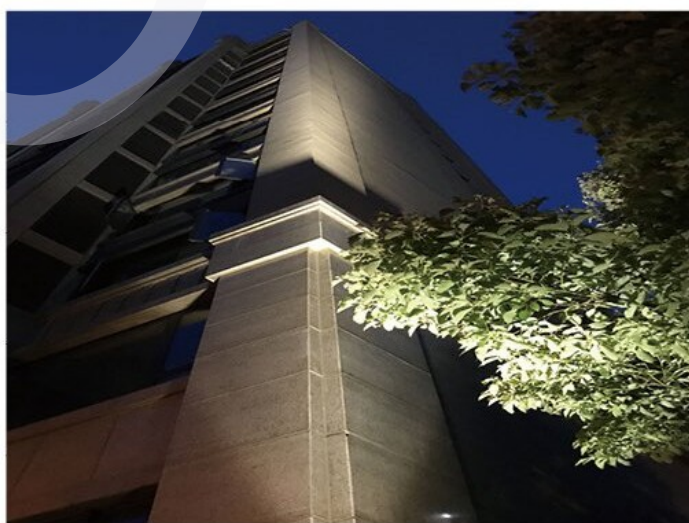


Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle(Reflector)
	Φ	H					
XGN-W320C	320	340	50WCOB	φ 295xH350mm	9.58	37.5x37.5x40.5CM/1PCS	30°
XGN-W320	320	340	50W	φ 295xH350mm	9.76	37.5x37.5x40.5CM/1PCS	6° / 15° / 30°

FLOOR GU10-MR11

Lumeitalia™



MXD-100-1

Technical Parameter

Model	Size(mm)		Holder	Hole Size(mm)	N.W(kg)	Packing Size
	Φ	H				
MXD-100-1	100	117	GU10/MR16	Φ90xH127mm	0.48	56x23x28CM/20PCS
MXD-100-3 方	100	117	GU10/MR16	Φ90xH127mm	0.5	56x23x28CM/20PCS
MXD-100-6	100	117	GU10/MR16	Φ90xH127mm	0.5	56x23x28CM/20PCS
MXD-120-1A	120	140	GU10/MR16	Φ100xH150mm	0.62	64x39x32CM/30PCS
MXD-120-1D	120	140	GU10/MR16	Φ100xH150mm	0.65	64x39x32CM/30PCS
NCC-120-1	120	130	GU10/MR16	Φ105xH140mm	0.64	64x39x32CM/30PCS



1




3



6

- ◆ Holder: GU10/MR16
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/Frosted), ABS box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



NCC-100-1R

Technical Parameter

Model	Size(mm)		Holder	Hole Size(mm)	N.W(kg)	Packing Size
	Φ	H				
NCC-100-1R	100	120	GU10/MR16	Φ90xH130mm	0.5	56x23x28CM/20PCS
NCC-120-1R	120	130	GU10/MR16	Φ105xH140mm	0.65	64x39x32CM/30PCS

FLOOR SIDE 130 Lumeitalia


TM



MXD-100-10A



- Chip: Epistar SMD/Bridgelux
- CCT: 3000K /4000K /6000K/R/G/B
- Material: Aluminum cover, Aluminum body, Tempered glass (Clear/Frosted), ABS box
- Input Voltage: 12V/24V/110-240V 50-60Hz

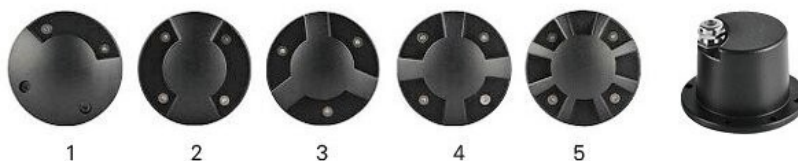

Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
MXD-100-10A	3W	Φ95*H85mm	0.4kg	56*34*25cm/30pcs



NCC-130-2T



Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
NCC-130-2T	3W	Φ125*H110mm	0.8kg	44*29.5*30cm/12pcs



NCC-150-4T



3X1W



Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
NCC-150-4T	3W	Φ145*H145mm	1.2kg	46*32*33cm/12pcs



FLOOR SIDE 210 LumeitaliaTM



NCC-100J



- ♦ Chip: Epistar SMD/Bridgelux
- ♦ CCT: 3000K /4000K /6000K/R/G/B
- ♦ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted) ABS box
- ♦ Input Voltage: 12V/24V/110-240V 50-60Hz



Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
NCC-100J	3W	Φ105*H100mm	1kg	36*36*28cm/18pcs
NCC-130J	6W	Φ120*H110mm	1.5kg	36*36*28cm/18pcs
NCC-150J	10W	Φ145*H145mm	2.4kg	36*36*28cm/18pcs



1



2



3



4



5



6



NCC-200J-1T




Technical Parameter

Model	Rated Power	Hole Size(mm)	N.W(kg)	Packing Size
NCC-200J	One side:4W Two side:8W	Φ195*H165mm	3.5kg	44*23*36cm/4pcs





MZ-4260



Technical Parameter


Model	Size(mm)			Hole Size(mm)	N.W(kg)	Angle(Lens)
	Φ	ΦA	H			
MZ-4260	260	330	260	24*2W	6.75kg	15° /30° / 45° / 60°





MZ-260L

- ◆ Chip: Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/Frosted), Aluminum box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz




Technical Parameter

Model	Size(mm)			Hole Size(mm)	N.W(kg)	Packing Size
	Φ	ΦA	H			
MZ-320L	320	380	290	36W	8.1kg	40*40*32cm/1pcs
MZ-260L	260	320	250	24W	5.5kg	34*32*34cm/1pcs
MZ-245L	245	300	300	18W	4.52kg	31.5*31.5*31.5cm/1pcs



MZ-160

- ◆ Chip: Epistar/Bridgelux
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass (Clear/Frosted), Aluminum box
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



Technical Parameter


Model	Size(mm)			Rated Power	N.W(kg)	Packing Size
	Φ	ΦA	H			
MZ-210	210	260	210	12W/15W/18W LED 20W COB	5.6kg	55*29*45cm/4pcs
MZ-160	160	210	205	6W/7W/9W LED 10W COB	2.52kg	67*45*30.5cm/6pcs
MZ-100	100	120	105	3W LED 3W COB	1.1kg	65*28*24cm/20pcs





XGN-2107

- ◆ Chip: Epistar SMD/Bridgelux
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover, Aluminum body, Tempered glass(Clear/Frosted), Aluminum box
- ◆ Input Voltage: DC24V

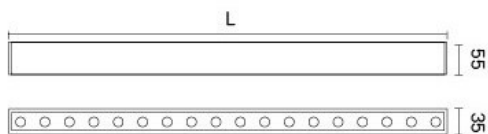


(Optional Holder)

1000mm/500mm/300mm



Technical Parameter

Model	Size(mm)			Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle (Lens)
	L	W	H					
XGN-2107	1000	35	55	24W/DC24V	1000*35*55mm	2.3kg	102.5*31.5*18cm/10pcs	20* 40 °
	500	35	55	12W/DC24V	500*35*H55mm	1.2kg	102.5*31.5*18cm/20pcs	20* 40 °
	300	35	55	6W/DC24V	300*35*H55mm	0.75kg	102.5*31.5*18cm/30pcs	20* 40 °



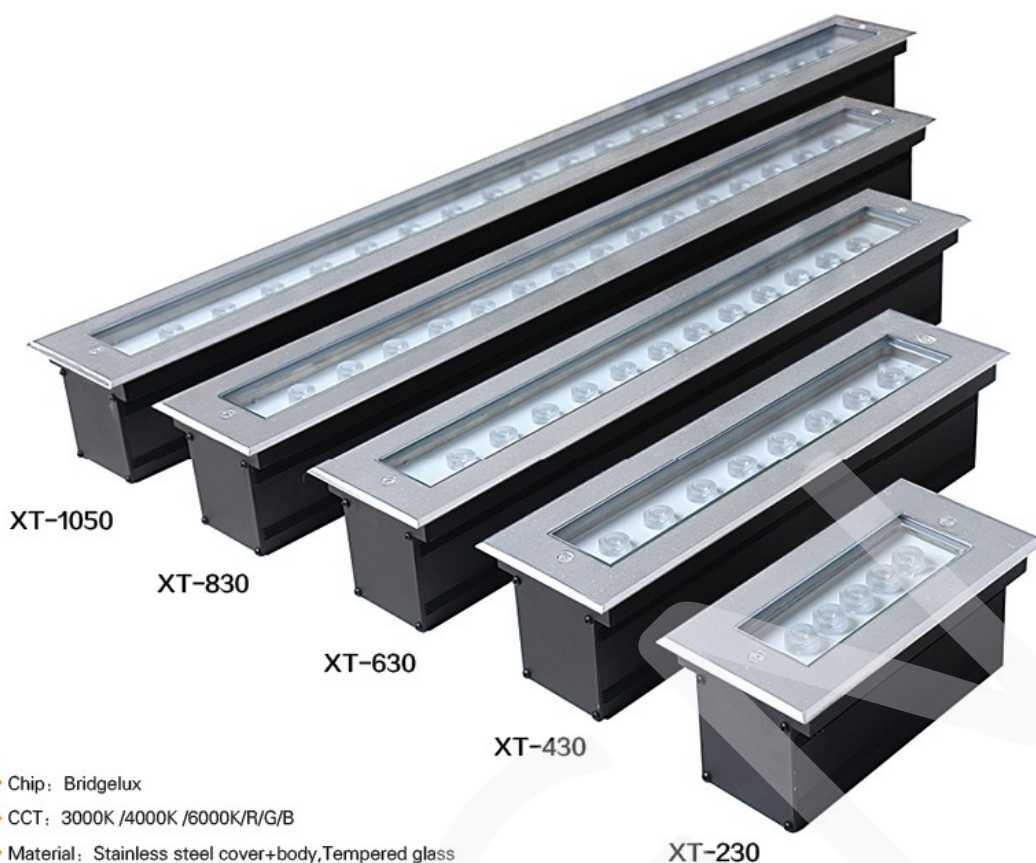

- ◆ Chip: Bridgelux
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass
(Clear/Frosted), Aluminum box
- ◆ Input Voltage: DC24V



Technical Parameter

Model	Size(mm)			Rated Power	Hole Size(mm)	N.W(kg)	Angle (Lens)
	L	W	H				
XT-1050	1050	115	105	18W	1025*105*H110mm	7.5kg	15° /30° /45° /60°
XT-830	830	115	105	15W	810*105*H110mm	6.3kg	15° /30° /45° /60°
XT-630	630	115	105	12W	610*105*H110mm	4.7kg	15° /30° /45° /60°
XT-430	430	115	105	8W/9W	410*105*H110mm	3.3kg	15° /30° /45° /60°
XT-230	230	115	105	5W	210*105*H110mm	1.85kg	15° /30° /45° /60°


SPOTLIGHT




XGN-R60 XGN-R90
BOMBO




XGN-Y60 XGN-Y85 XGN-Y140
ELIOS

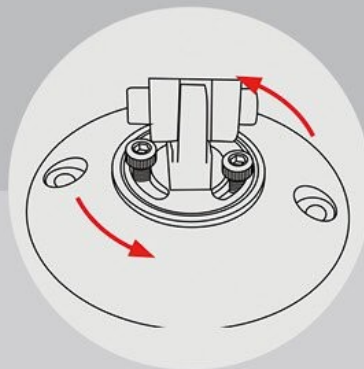



XGN-Y140

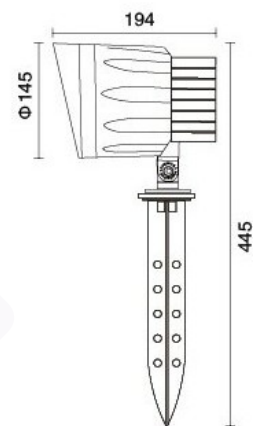

- Chip: CREE XPE
- CCT: 3000K/4000K/6000K/R/G/B
- Material: Aluminum body, Tempered glass (Clear/Frosted)
- Input Voltage: 12V/24V/220V 50-60Hz



(customized choice)

Technical Parameter

Model	Rated Power	N.W(kg)	Angle (Lens)
XGN-Y140	9*3W	2.85kg	6° /15° /30°
	30W COB	2.8kg	17° /26°



BOMBO XGN

LumeitaliaTM




XGN-C901

XGN-C601



XGN-R60





Technical Parameter

Model	Size(mm)	Rated Power	Chip	Angle (Lens)
XGN-C901	Φ90*140*H880	6*2W	CREE	6° /15° /30°
XGN-C601	Φ60*100*H550	3*2W	CREE	6° /15° /30°
XGN-R60	Φ60*100*H170	3*2W	CREE	6° /15° /30°



XGN-R901

XGN-R601

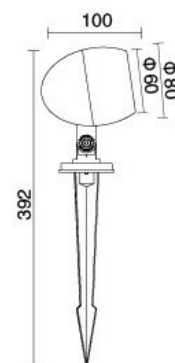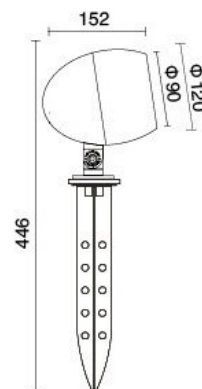

Technical Parameter

Model	Size(mm)	Rated Power	Chip	Angle (Lens)
XGN-R901	Φ90*140*H880	6*2W	CREE	6° /15° /30°
XGN-R601	Φ60*100*H550	3*2W	CREE	6° /15° /30°

ELIOS XGN




LumeitaliaTM



XGN-Y110



XGN-2072

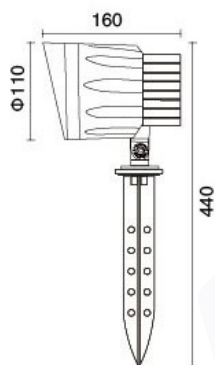



XGN-2073

Technical Parameter


Model	Size(mm)	Rated Power	Chip	Angle (Lens)
XGN-Y110	Φ 110*160*H440	20W COB / 6*3W	CREE	COB 26° 6° /15° /30°
XGN-2072	Φ 72*170*H400	10W COB/3*3W	CREE	COB 38° 6° /15° /30°
XGN-2073	Φ 100*170*H440	15W COB/6*3W	CREE	COB 38° 6° /15° /30°



XGN-Y60

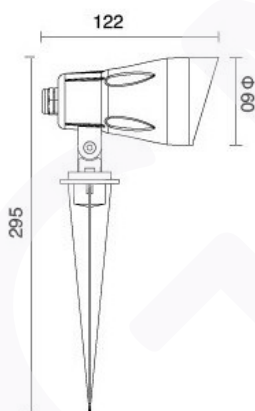

- ◆ Chip: CREE
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum body, Tempered glass (Clear/Frosted)
- ◆ Input Voltage: 12V/24V/220V 50-60Hz






Technical Parameter

Model	Rated Power	N.W(kg)	Angle (Lens)
XGN-Y60	1*3W	0.5kg	6° /15° /30°
	3W COB	0.5kg	38°



XGN-Y85

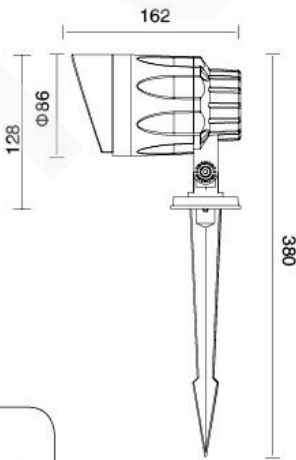


Technical Parameter

Model	Rated Power	N.W(kg)	Angle (Lens)
XGN-Y85	3*3W	1.05kg	6° /15° /30°
	10W COB	1.05kg	38°




XGN-2001




- ◆ Chip: CREE XPE
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum body, Tempered glass(Clear/Frosted)
- ◆ Input Voltage: 12V/24V/220V 50-60Hz



XGN-2002



XGN-2003



Technical Parameter

Model	Size(mm)	Rated Power	Chip	Angle (Lens)
XGN-2001	155*100*131	16*3W	CREE	10° /20°
XGN-2002	115*93*112	9*3W	CREE	10° /20°
XGN-2003	90*92*100	4*3W	CREE	10° /20°


GO22 MINI EX

LumeitaliaTM




XGN-2105

- ◆ Chip: CREE XPE
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum body, Tempered glass (Clear/Frosted)
- ◆ Input Voltage: 12V/24V/220V 50-60Hz

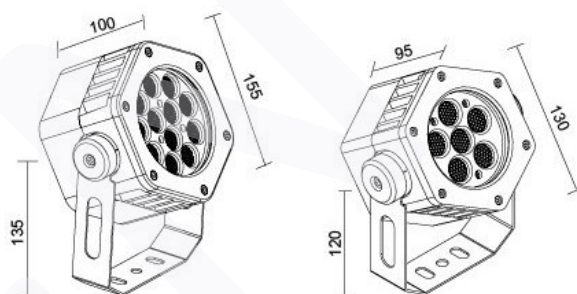

XGN-2106



Technical Parameter

Model	Size(mm)	Rated Power	Chip	Angle (Lens)
XGN-2104	155*100*135	12*3W	CREE	10° /20°
XGN-2105	130*95*120	6*3W	CREE	10° /20°
XGN-2106	105*90*100	3*3W	CREE	10° /20°



**UNDERWATER
LIGHTS**

MG-K190


MG-85

MG-J98

FLOOR-UN-H2O LumeitaliaTM



MG-X04



- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass(Clear/Frosted)
- ◆ Input Voltage: 12V/24V

Technical Parameter

Model	Size(mm)			Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle (Lens)
	Φ	ΦA	H					
MG-X07	230	65	76	18W	Φ 210*H85	2.4kg	52*30*46cm/8pcs	15° /30° /45° /60°
MG-X01	210	52	90	12W	Φ 190*H90	1.9kg	47*45.5*34.5cm/8pcs	15° /30° /45° /60°
MG-X06	210	52	80	9W/12W	Φ 180*H90	1.8kg	47*47*35cm/8pcs	15° /30° /45° /60°
MG-X02	180	41	85	9W/12W	Φ 165*H90	1.5kg	57*38*30cm/12pcs	15° /30° /45° /60°
MG-X03	168	34	80	6W/9W	Φ 155*H80	1.3kg	57*38*30cm/12pcs	15° /30° /45° /60°
MG-X04	150	26	85	6W	Φ 130*H80	1.05kg	48*31.5*30cm/18pcs	15° /30° /45° /60°
MG-X05	130	26	55	5W	Φ 118*H65	1kg	61*45*24cm/24pcs	15° /30° /45° /60°



H2O SPOT

LumeitaliaTM



- ♦ Chip: Bridgelux
- ♦ CCT: 3000K/4000K/6000K/R/G/B
- ♦ Material: Stainless steel cover+body, Tempered glass(Clear/Frosted)
- ♦ Input Voltage: 12V/24V

Technical Parameter

Model	MG-190A	MG-145A
Size	Φ 190*H180mm	Φ 145*H170mm
Rated Power	12W	6W/7W/9W
Input Voltage	12V/24V	
N.W/G.W	1.6kg	1.15kg
Packing Size	43*42*49cm/12pcs	48*47*35cm/18pcs
Angle(Lens)	15° /30° /45° /60°	15° /30° /45° /60°

Technical Parameter


Model	MG-145	MG-115
Size	Φ 145*H170mm	Φ 115*H150mm
Rated Power	6W/7W/9W	3W/5W
Input Voltage	12V/24V	
N.W/G.W	0.9kg	0.9kg
Packing Size	48*47*35cm/18pcs	49.5*49.5*29.5cm/32pcs
Angle(Lens)	15° /30° /45° /60°	15° /30° /45° /60°

Technical Parameter

Model	MG-85A	MG-82
Size	Φ 85*H125mm	Φ 82*H155mm
Rated Power	3W	3W
Input Voltage	12V/24V	
N.W/G.W	0.5kg	0.6kg
Packing Size	56*34*28cm/30pcs	52*52*28cm/50pcs
Angle(Lens)	15° /30° /45° /60°	15° /30° /45° /60°

H2O SPOT 2

LumeitaliaTM




MG-76

Technical Parameter

Model	Size(mm)		Rated Power	N.W(kg)	Angle (Lens)
	Φ	H			
MG-76	76	106	3W	0.65kg	15° /30° /45° /60°

- ♦ Chip: Bridgelux
- ♦ CCT: 3000K/4000K/6000K/R/G/B
- ♦ Material: Stainless steel cover+body, Tempered glass (Clear/Frosted)
- ♦ Input Voltage: 12V/24V




MG-125

Technical Parameter

Model	Size(mm)			Rated Power	N.W(kg)	Angle (Lens)
	Φ	ΦA	H			
MG-103	105	65	150	3W	0.7kg	15° /30° /45° /60°
MG-125	125	75	185	6W	0.95kg	15° /30° /45° /60°
MG-140	145	85	200	9W	1.25kg	15° /30° /45° /60°



MG-Q150




- Chip: Bridgelux
- CCT: 3000K/4000K/6000K/R/G/B
- Material: Stainless steel cover+body, Tempered glass(Clear/Frosted), ABS box
- Input Voltage: 12V/24V

Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle (Lens)
	Φ	H					
MG-H250	250	120	18W-24W	Φ245*H135	2.5kg	54*28*42cm/6pcs	15° / 30° /45 ° /60°
MG-Q170	168	135	9W /7W	Φ160*H145	1.25kg	53*36*47.8cm/18pcs	15° / 30° /45 ° /60°
MG-Q150	150	110	5-9W	Φ140*H20	1kg	50.5*50.5*26cm/18pcs	15° / 30° /45 ° /60°
MG-Q130	130	110	5W /6W	Φ125*H120	0.7kg	54.5*41*31cm/24pcs	15° / 30° /45 ° /60°
MG-Q100A	100	108	3W	Φ90*H120	0.45kg	56*34*25cm/30pcs	15° / 30° /45 ° /60°
MG-Q100	100	75	3W	Φ90*H85	0.42kg	53*32*22cm/30pcs	15° / 30° /45 ° /60°



MG-K350



- Chip: Bridgelux
- CCT: 3000K/4000K/6000K/R/G/B
- Material: Stainless steel cover+body, Tempered glass(Clear/Frosted), ABS box
- Input Voltage: 12V/24V


Technical Parameter

Model	Size(mm)		Rated Power	Hole Size(mm)	N.W(kg)	Packing Size	Angle (Lens)
	Φ	H					
MG-K350	350	170	60W	Φ340*H185	8.85kg	36*36*38cm/2pcs	15° / 30° /45 ° /60°
MG-K250	250	120	18W-24W	Φ245*H135	2.5kg	54*28*42cm/6pcs	15° / 30° /45 ° /60°
MG-K210	210	135	18W-24W	Φ196*H145	2.35kg	46*46*34.5cm/8pcs	15° / 30° /45 ° /60°
MG-K190	190	125	15W	Φ175*H135	1.9kg	41.5*41.5*48.5cm/12pcs	15° / 30° /45 ° /60°

MAXI SPOT H20 Lumeitalia™



MG-240




- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass(Clear/Frosted)
- ◆ Input Voltage: 12V/24V

Technical Parameter

Model	Size(mm)			Rated Power	N.W(kg)	Packing Size	Angle (Lens)
	Φ	ΦA	H				
MG-240	240	100	220	24W	3.8kg	54*53*35cm/8pcs	15° /30° /45° /60°
MG-210	210	200	220	18W	3.1kg	46*46*35cm/8pcs	15° /30° /45° /60°
MG-190	190	100	200	12W	2.4kg	43*42*49cm/12pcs	15° /30° /45° /60°
MG-145C	145	85	170	7W	1.1kg	53*37*49cm/18pcs	15° /30° /45° /60°



MG-350




Technical Parameter

Model	Size(mm)			Rated Power	N.W(kg)	Angle (Lens)
	Φ	ΦA	H			
MG-350	350	110	290	60W	11kg	15° /30° /45° /60°
MG-270	270	200	180	36W	6.6kg	15° /30° /45° /60°





MG-85 (浇钢)




- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Cast steel cover+body, Tempered glass (Clear/Frosted)
- ◆ Input Voltage: 12V/24V

Technical Parameter

Model	Size(mm)			Rated Power	N.W(kg)	Packing Size	Angle (Lens)
	Φ	A	H				
MG-85	85	120	75	3W	0.9kg	56*34*28cm/30pcs	15° /30° /45° /60°



MG-J98 (浇钢)



Technical Parameter

Model	Size(mm)			Rated Power	N.W(kg)	Packing Size	Angle (Lens)
	Φ	ΦA	H				
MG-J98	98	60	150	3W	1.35kg	38*35*34cm/24pcs	15° /30° /45° /60°
MG-J140	140	70	190	5W/6W	2.75kg	52*35.5*26.5cm/12pcs	15° /30° /45° /60°
MG-J170	170	70	200	12W	3.3kg	39*39*28.5cm/8pcs	15° /30° /45° /60°

cÔTÉ SOL W Lumeitalia™






XGN-B10



XGN-B13




XGN-B145



- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum cover+body, PC glass
- ◆ Input Voltage: 12V/24V/110-240V

Technical Parameter


Model	Size(mm)	Rated Power
XGN-B10	Φ 100*H30	3W
XGN-B13	Φ 130*H40	3W
XGN-B145	Φ 145*H50	3W

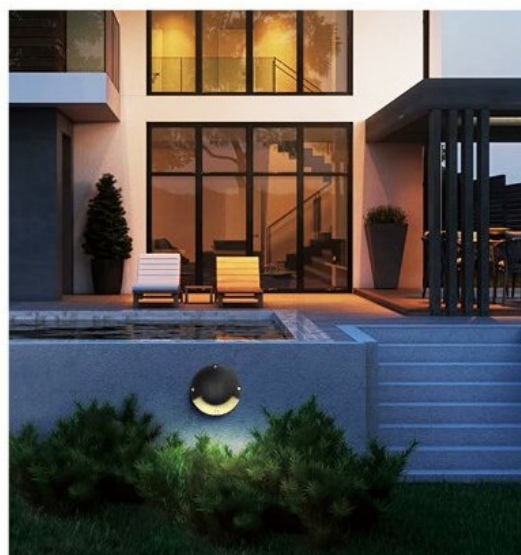



TUBES XL LumeitaliaTM



XGN-B1001



XGN-B1002



- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum cover+body, Tempered glass(Clear/Frosted)
- ◆ Input Voltage: 12V/24V/110-240V 50-60Hz


Technical Parameter

Model	Size(mm)	Light Source Power	Total power(W)	N.W(kg)
XGN-B1001	Φ 100*150*H126mm	COB 15W*1 side	15W	1.6kg
		6*3W*1 side	18W	1.6kg
XGN-B1002	Φ 100*150*H200mm	COB 15W*2 side	30W	2.4kg
		6*3W*2 side	36W	2.4kg


TUBES LumeitaliaTM



XGN-B7201



XGN-B7202



- ◆ Chip: Bridgelux
- ◆ CCT: 3000K/4000K/6000K/R/G/B
- ◆ Material: Aluminum cover+body, Tempered glass (Clear/Frosted)
- ◆ Input Voltage: 12V/24V/110-240V 50-60Hz

Technical Parameter

Model	Size(mm)	Light Source Power	Total power(W)	N.W(kg)
XGN-B7201	Φ 72*120*H126mm	COB 10W*1 side	10Wx1	1.0kg
		3*3W*1 side	9Wx1	1.0kg
XGN-B7202	Φ 72*120*H200mm	COB 10W*2 side	10Wx2	1.5kg
		3*3W*2 side	9Wx2	1.5kg

Lumeitalia

MYA TECH SRL

SIÈGE SOCIAL : Via Treves 72/74 20090 TREZZANO SUL NAVIGLIO (MI)

LUMEITALIA : Via Rosselli 74 20090 TREZZANO SUL NAVIGLIO (MI)

ENTREPÔT : Via Curiel 9 20090 TREZZANO SUL NAVIGLIO (MI)

www.lumeitalia.it

www.mya-tech.net